

SPECIFICATIONS				
GLS-2200				
Type	Short	Middle	Long	
Distance [*]				
Detail (90% reflectivity)	100m	100m	100m	
High Speed (90% reflectivity))	130m	210m	210m	
Low Power (90% reflectivity)	130m	210m	210m	
Standard (90% reflectivity)	-	350m	500m	
Close Scan (9% reflectivity)	40m	40m	40m	
Scanning Module				
Scan mode ^{**}	Detail	High Speed	Low Power	Standard
Scan data rate (Maximum points per second)	120,000	120,000	48,000	60,000
Laser Class	Class 3R		Class 1	Class 3R
Laser	1064nm			
Scanning Density (Resolving Power)				
Spot Size(FWHM)	φ ≤4mm 1 to 20m	φ ≤11mm 1 to 150m		
Point Increment	Minimum 3.1mm (At 10m)			
Maximum Point Number	V:15,202 Pt/Line (270°) H:20,268 Pt/Line (360°)			
Field of View	V:270° / H:360°			
Angle Accuracy	H: 6" / V: 6"			
Distance Accuracy	3.1mm (σ) At 1 to 90m	3.1mm (σ) At 1 to 110m	3.7mm (σ) At 1 to 110m	3.1mm (σ) At 1 to 150m
Surface Accuracy	1.0mm (σ) ^{***}			
At 1 to 90m		At 1 to 110m	At 1 to 110m	At 1 to 150m
Height Measurement				
Measuring Range	0.3 to 2.0m			
Measuring Accuracy	3.0mm (Req. Special Target)			
Camera				
Field Angle	Wide : Diagonal 170° Tele. : 8.9°(V) x 11.9°(H)			
Number of pixels	Both Wide & Tele. 5megapixels			
HDR	Yes			
Tilt Sensor				
Type	Liquid 2-axis tilt-sensor			
Compensation Range	±6'			
Display Unit				
Type	TFT-LCD 3.5 VGA with touch-panel			
Others				
Laser Plummet	Spot Size φ1mm (1m) / φ4mm (1.5m)			
Imaging Plummet	Magnification range 1m			
Interface				
Card Slot	SD card (SDHC Class 6 or more)			
Power Supply				
Internal Battery	BDC72			
Capacity	5240mAh / 1pce × 4pcs			
Nominal Voltage	7.4V / 1pce x pcs			
Working Duration	2.5 hours (4pcs continuous scanning)			
Appearance				
Dimension	228(D)×293 (W)×390 (H) mm(With handle & Base)			
Inst height	226mm (From top of base to center of Miller)			
Weight	10kg (Include Base and Battery)			
Condition				
Operating Temperature	-5 to +45°C			
Storage Temperature	-20 to +60°C			
Water & Dust Resistance	IP54 (JIS C0920, IEC 60529)			

*1:It will be different depending on the condition.

*2: Specification of Close Scan mode is listed inside the catalog.

*3: When the smoothing function is used for MAGNET Collage Ver2.3 or later.

GLS-2200

Post-processing software forTopcon's mass data solutions



GLS-2200Series

CAPTURE REALITY

3DLaserScanner



- Standard Components
- GLS-2200
 - Battery (BDC72) 4 pieces
 - Battery Charger (CDC77) 2 pieces
 - Charging Cable (EDC113) 2 pieces
 - Carrying case
 - Silica gel
 - Cloth wipe
 - SD card
- SD card case
 - Tool kit
 - Target sheet
 - Centering target
 - Instruction manual
 - Warranty card

- Specifications may vary by region and are subject to change without notice.
- Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Topcon is under license.
- Other trademarks and trade names are those of their respective owners.

Your local Authorized Dealer is:



PT. EXACT GLOBAL TEKNOLOGI
Indonesia Authorized Agent

Contact Us

Menara Asia Afrika, 133-137, 9th Floor,
Bandung City, West Java 40112
Phone :022 8732 1192
Mobile :+62 812 9252 3900
Email :marketing@exactglobal.co.id
Website : www.exactglobal.co.id




Best fit for ICT construction,
expanding various applications

Precise 3D point cloud data maintains accuracy

- Resection, occupation/back sight on-board program
- 360° prism, long-range target scan
- Surface accuracy 1mm(σ)
- HDR image capture creates clear point cloud data
- Remote control
- Japanese quality

Effective workflow and qualified point cloud to expand various applications such as Earthmoving, Paving and Structure Building

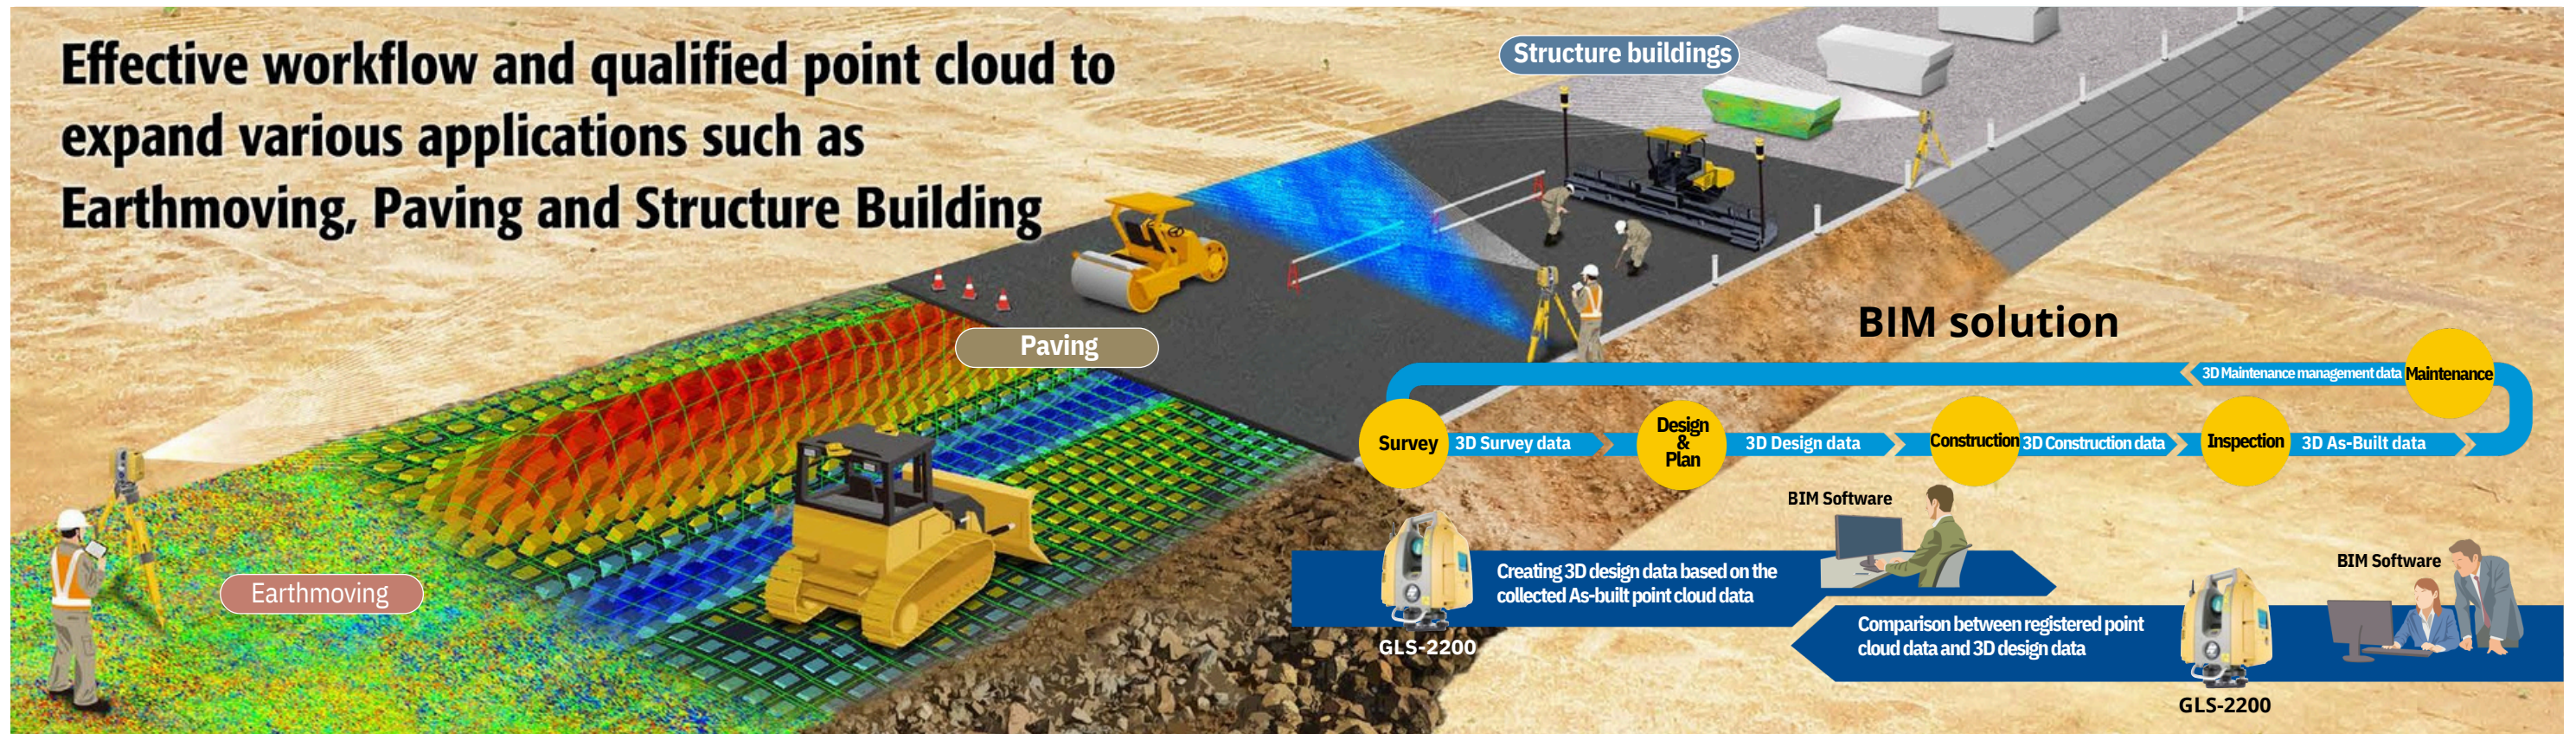


Effective workflow with verified point cloud data

Long-range target scan


200m range for the resection or traverse methods greatly reduces the need to change the target positions, even on large sites.

360°prism compliant

Scan targets from anywhere without changing the direction of the target scan.

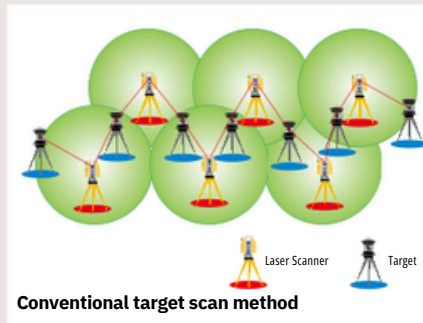

Conventional target scan method

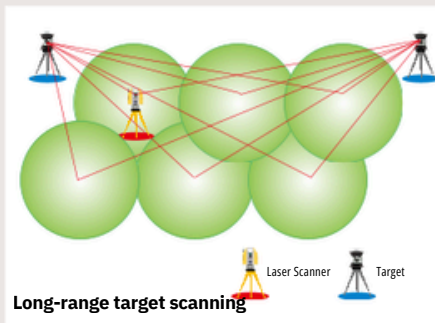

Long-range target scanning


Surface accuracy 1mm*(σ)

Road mode is a fit for ICT paving construction, as-builts and QA/QC for BIM.

* Standard deviation (1σ)1mm. ProcessedwithMAGNETCollage.


HDR image capture creates clear point cloud data

Normal images of 3D point cloud data tend to have washed-out whites and unrecognizable dark spaces. The colorized 3D point cloud data creates HDR images with more natural and realistic colors.

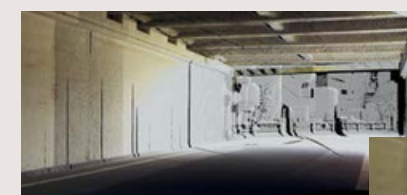

Colorized 3D point cloud data (with normal images)

Colorized 3D point cloud data (with HDR images)



Three modules are available for measuring different ranges

The product measures distances ranging from short, interior measurement of a facility to as-built civil engineering projects and other large structures.



Occ/Backsight, and Resection program on board

Survey method registration can be done at the site with the program on board, so you can save the working time at the software side.



Easy and intuitive on-board control software

With the on-board control software, the scanning can be simply started with one-touch of button. Together with color graphical display, scanning operation can be intuitively proceeded.



WLAN Connectivity for connecting to an Android Tablet *

WLAN capability enables users to remotely control their Android tablets. All activity in the tablet is relayed to the scanner.

*Offeredasan option in someareas.




Supports eight measurement modes

GLS-2200 provides a wide range of measuring modes to accommodate different job site demands to achieve accurate measurement and increase productivity regardless of site conditions.



Road mode

The road mode can scan even dark-colored surfaces such as paved asphalt and ICT paving construction.



wide angle camera

Dual cameras

Dual coaxial 5MP cameras capture both high-speed 170° wide angle and 8.9° narrow images.



narrow angle camera



Dual-axis-tilt compensation secures the right registration


The dual-axis-tilt compensation ($x/-6^\circ$) is identical to that available on total stations. The scan data can be accurately registered using the MAGNET Collage post-processing software.

Supporting Various Registration Methods

The GLS-2200 can execute field work similar to that of total stations by supporting various registration methods.


	Traverse	Resection	Tie Point	Shape Matching	Manual Registration	Station Set
Target Setting	Necessary (1 point)	Necessary (More than 2 points)	Necessary (many)	Unnecessary	Unnecessary	Combined Registration
Localization	Possible	Possible	Possible	Not Possible	Not Possible	
Working Time	Quick	Quick	Long *	Quick	Quick	
Registration Accuracy	High	High	High	Low	Low	

* Multiple target scanning is necessary

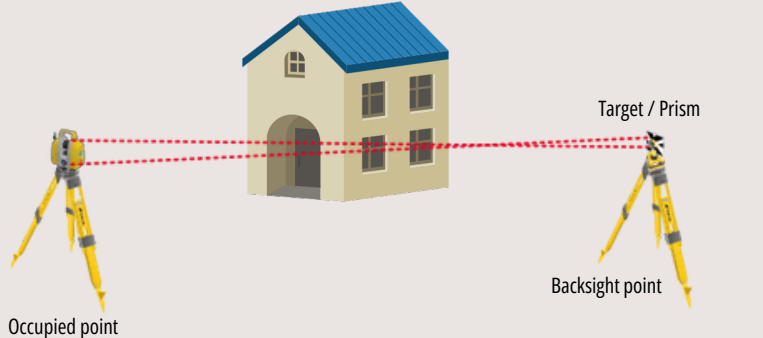

Traverse Method **Simple** **High accuracy**

Highly accurate merging makes the GLS-2200 effective for measuring long-distances and complex objects.

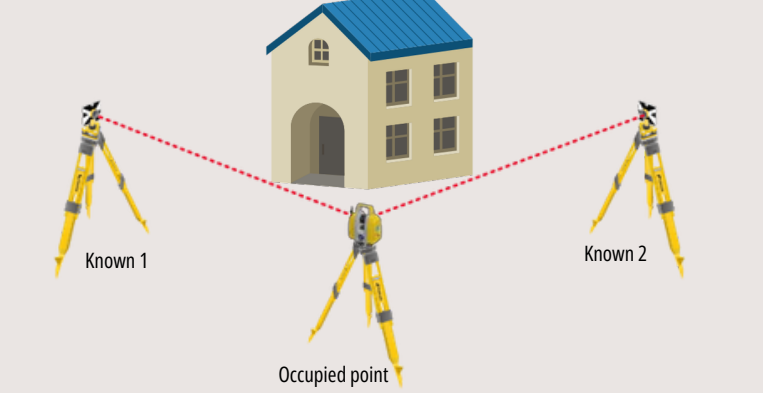


Resection **Simple** **High accuracy**

Good for construction site. Set up station freely.

Maximum range at reflectivity

Reflectivity	9%	18%	90%
Short	40m (Detail)	90m (High Speed / Low Power)	130m (High Speed / Low Power)
Middle	40m (Detail)	150m (Standard)	350m (Standard)
Long	40m (Detail)	210m (Standard)	500m (Standard)

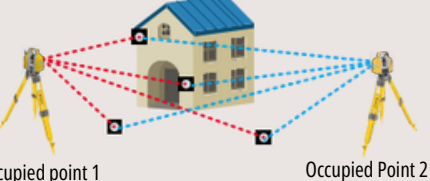

Tie-point Method **High accuracy**

Effective for accurate and secure merging of multiple scanned data.




Cloud to Cloud **Simple**

Effective for quick measurement.



Manual Registration **Simple**

You can move point cloud effectively.

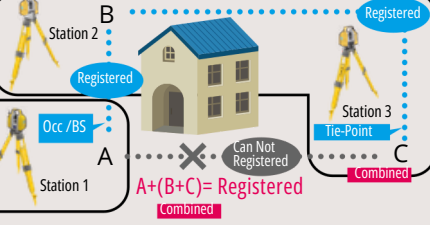


Station Set **Certain**

You can combine registered point clouds to register all station set.

GLS-2200

MAGNET Collage seamlessly connects 3D solutiontothesite.

The MAGNET Collage 3D mass-data software supports processing, editing, exporting and integration of point-cloud data to rapidly create 3D models.

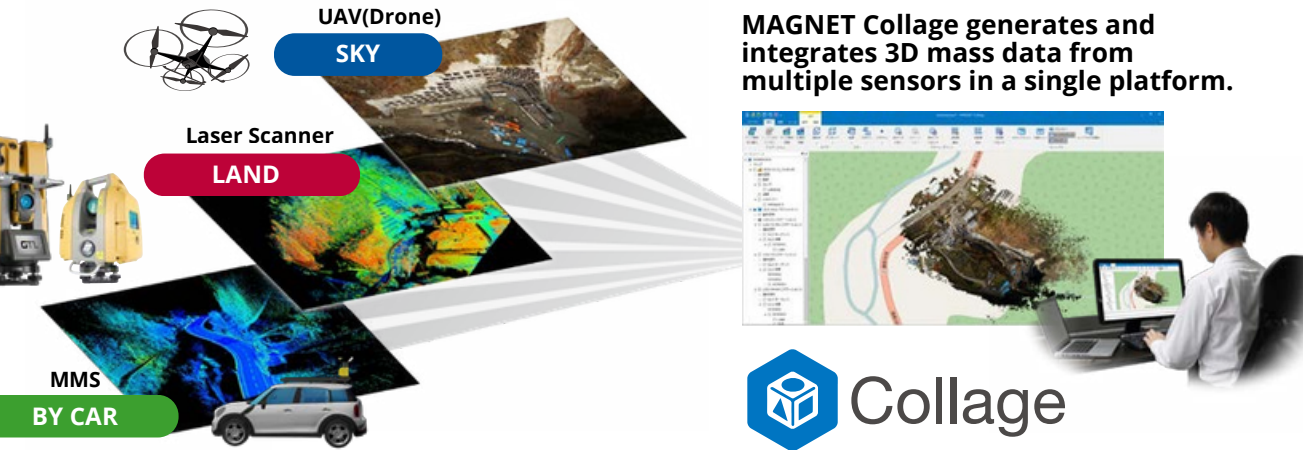


MAGNET Collage generates and integrates 3D mass data from multiple sensors in a single platform.

Collage

3D Mass Data Viewer (Optional)

Collage Web

MAGNET Collage Web enables users to access point-cloud mass data online to view slices, measure distances and calculate areas.

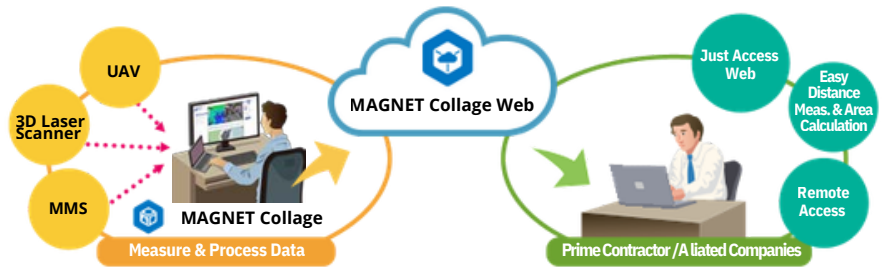

Allied Office software

CLEAREDGE^{3D}

Faster, More Accurate 3D Modeling

EDGEWISE

Automatically Extract
BIM Model Elements
from Point Cloud Data



Construction Verification Software

VERITY


Automatically Compare
Point Clouds vs BIM Model
and Visualize Installation Accuracy



Floor Flatness and Levelness Analysis Software

RITHM


Efficiently Analyze
Floor Flatness and Levelness
Using Point Cloud Data



AUTODESK

The AEC Collection provides designers, engineers, and contractors a set of BIM and CAD tools that support projects from early-stage design through to construction.

**AUTODESK®
REVIT®**



- Begin modeling in 3D with accuracy and precision.
- Automatically update floor plans, elevations, and sections as your model develops.
- Let Revit handle routine and repetitive tasks with automation so you can focus on higher-value work.

**AUTODESK®
NAVISWORKS®**




- Combine design and construction data into a single model.
- Identify and resolve clash and interference problems before construction.
- Aggregate data from multiple trades to better control outcomes.

GLS-2200 Applications


i-Construction

GLS-2200 meets the needs for i-Construction productivity improvements as promoted by the Japanese Ministry of Land, Infrastructure and Transport (MLIT). Laser scanner and UAV technologies have been leveraged for terrain survey, progress and management of deliverables. This greatly reduces construction time for earthworks, paving, slope shaping and structure-installation works; and simplifies submission of inspection documents.

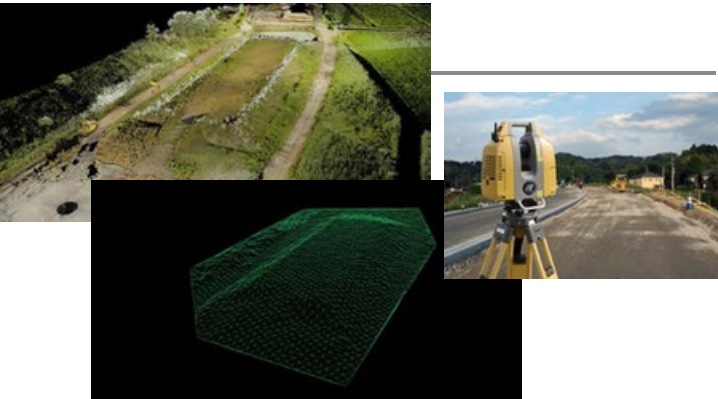


Road / slope surface measurement

Terrestrial Laser Scanner is very effective for road or slope surface measurement. For road surface measurement, the shape of rut on road can be collected and its data can be used for maintenance management purpose. For slope surface measurement, it is effective for measuring disaster areas as well as monitoring deterioration.

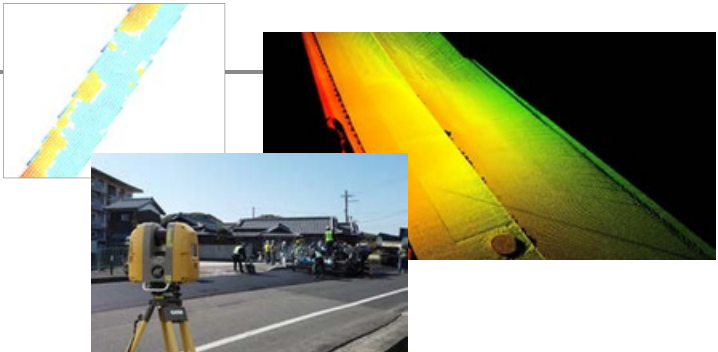


Tunnel cross-sections

create 3D drawings for complex tunnel curves and intersections. Extract cross-sections as needed. Effortlessly compare design data with existing scanned surfaces.

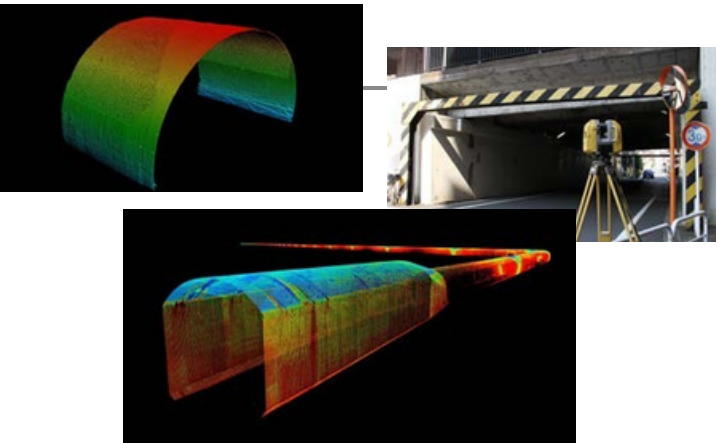


Infrastructure inspection

Measuring the entire structure in 3D allows the scanned data to be used for checking locations that require redesign, and verifying structural sizes and estimating materials.

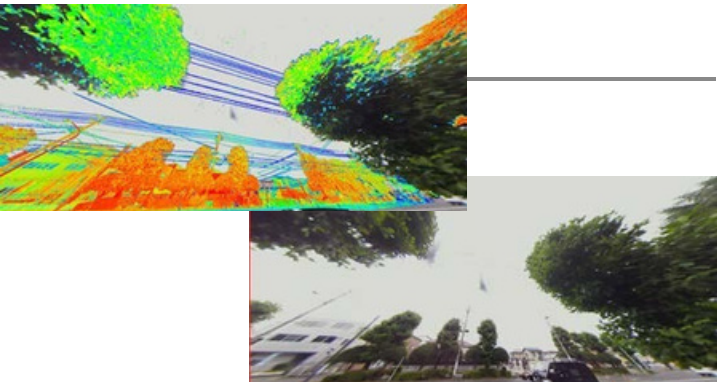


BIM (Building Information Modeling)

The BIM applications include scanning terrains and checking as-built renovations of outdoor and indoor areas. You can leverage 3D point cloud data to help with designs, and use the completed scan for future maintenance and renovation.

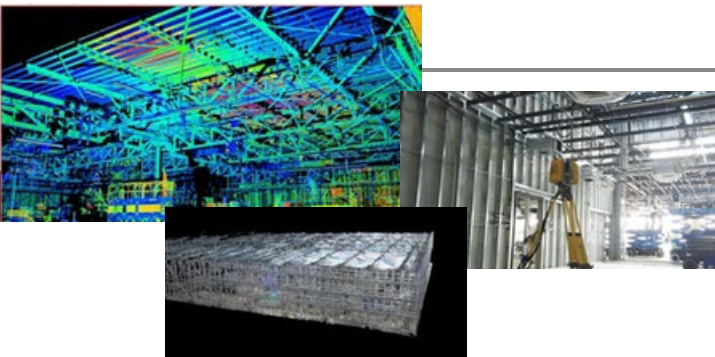

As-built structural checking facilities

Laser scanning is beneficial for verification of renovations and replacement facilities. Rapid scanning to create accurate point cloud data enables the use of 3D drawings to simulate pipe installations and clash detection.

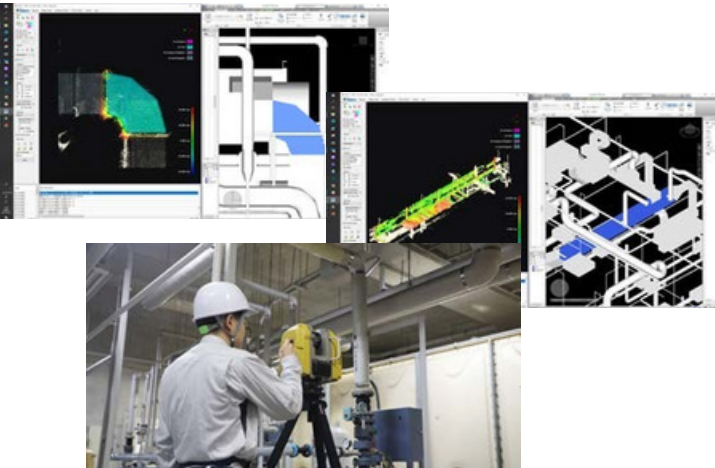

Heritage/ and archaeological structures

Laser scanning is invaluable for maintaining and archiving details of historical and archaeological structures that lack any design drawings. The no-contact process enables data to be collected without damaging the structure. Colorized point clouds reproduce the real color of the structure.



Reference object to be measured

Range Mode	Reference object to be measured
Detail	Prominent objects, archaeological sites, historical building, etc.
High Speed	Accident investigations, disasters areas, short timeframe projects, etc.
Low Power	Heavy pedestrian areas, laser limitation areas, etc.
Standard	Large structure, large residential areas, volume measurements, etc.
Close	Hard-to-measure objects in close proximity with each other.*
Close (High Power)	Objects which cannot easily be measured, even with CClose mode.
Road	Existing asphalt or concrete road surface.
Road (High Power)	New asphalt road surface

* Wet objects, black cables, shiny duct, etc.